

Product Information

Norm	EN ISO 10582				* check individual ref. for available widths
Intensity of use	ISO 10874	(EN 685)		34 Commercial very heavy 43 Industrial heavy	class
Total Thickness	EN ISO 24346	(EN 428)		2,00	mm
Wearlayer	EN ISO 24340	(EN 429)		0,70	mm
Abrasion group	EN 660-2			T	class
Total weight	EN ISO 23997	(EN 430)		2800	gr/m ²
Standard width	EN ISO 24341	(EN 426)		2 - 4 *	m
Standard length	EN ISO 24341	(EN 426)		25	m

Technical Information

Dimensional stability	EN ISO 23999	(EN 434)		≤ 0,40	%
Curling	EN ISO 23999			≤ 8	mm
Light stability	EN ISO 105 B02			≥ 6	degree
Residual indentation	EN ISO 24343-1	(EN 433)		< 0,1	mm
Impact sound improvement	EN ISO 717/2			Δ Lw 6	dB
Dynamic coefficient of friction	EN 13893			> 0,6	
Slip resistance (ramp test with oil)	DIN 51130			R10	scale
Reaction to fire Report number ---- VNLf 031380.4	EN 13501-1			Bfl/S1	class
Underfloor heating	EN 12667			Suitable	
Thermal resistance	ISO 8302			0,014	m ² /Kw
Thermal conductivity	EN 12524			0,14	W/(m.K)
Chemical resistance / effect of stains	ISO 26987 (EN 423)			good	
Static Electrical Propensity	EN 1815			< 2kV	On concrete
Delamination test (peel resistance)	EN ISO 24345			≥50N/50mm	
Furniture leg resistance	ISO 16581 (EN 424)			no damage	
Castor chair resistance	EN ISO 4918			Suitable (type wheel H)	

Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers



E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m³ of air)



Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)




100% phthalate free
*for all products produced from May 2017 onwards



Slovenian plant / Certified ISO 14001
Slovenian / Belgium plant / Certified ISO 9001

Product Build

1. PU lacquer
2. Wear layer
3. Design layer
4. Foam layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

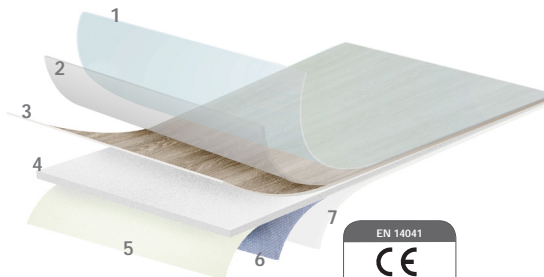

Nr. du certificat: 357- 004.1
344- 006.1



Features

